


VX10 10"2-WAY PASSIVE POINT SOURCE LOUDSPEAKER





The VX10 from the PENTON PRO series is a 2-way passive point source loudspeaker designed for high-performance audio applications. It delivers clear speech intelligibility and dynamic music reproduction with ultra-low harmonic distortion (<1%) and a maximum SPL of 129 dB @ 1m, making it ideal for clubs, theatres, conference rooms, and fitness spaces.

The VX10 features a 10" high-sensitivity low-frequency driver and a 1.5" compression driver mounted on a rotatable 80° x 50° constant directivity horn, providing consistent coverage and natural sound. Its passive crossover with air-core inductors ensures accurate phase response and minimal distortion.

The multi-layer plywood enclosure, coated with impact- and water-resistant paint, and the metal grille with acoustically transparent foam guarantee durability. M8 mounting inserts and a 35 mm pole socket make it suitable for both fixed and mobile installations.

For extended low-frequency performance, the VX10 can be paired with the VX15B subwoofer.

FEATURES

- POINT SOURCE LOUDSPEAKER
- INSTALLATION HIGH PERFORMANCE
- APPLICATIONS: CLUBS, CONCERT HALLS, THEATERS, CONFERENCE ROOMS, FITNESS
- COMPACT AND LIGHTWEIGHT DESIGN EASY TO INSTALL IN BOTH FIXED AND MOBILE SETUPS
- WIDE FREQUENCY RESPONSE ENSURING CLEAR VOICE AND DYNAMIC MUSIC REPRODUCTION
- ROBUST ENCLOSURE MULTI-LAYER PLYWOOD WITH IMPACT- AND WATER-RESISTANT PAINT
 FLEXIBLE MOUNTING OPTIONS M8 INSERTS AND 35 MM POLE MOUNT SOCKET
- RECOMMENDED AMPLIFIER POWER: 400 650 W @ 8 OHM



ATEÏS Europe B.V.


Celsiusstraat 1, 2652 XN Lansingerland, Netherlands Phone +31 (0)10 208 86 90, www.ateis-europe.com, info.eu@ateis.global





TECHNICAL SPECIFICATIONS


VX10


Components	10"/1.5"
Coverage, Degrees	80 x 50 or 50 x 80 rotatable horn
Frequency range (-3 dB), Hz	100 – 22000
Frequency range (-6 dB), Hz	90 – 22000
Maximum sound pressure 1 m (SPL)@ 1 m, dB	129
Harmonic distortion, rated power	<1%
Harmonic distortion, maximum power	<5%
Directional pattern, Degrees	80 x 50
Impedance, Ohm	8
Rated power, Watts	400
Peak power (10ms), Watts	650
Connectors	1 x NL4, 1 x Phoenix 4pin
Dimensions, WxHxD, mm	311 x 530 x 291
Weight, kg	14.5
Colour	Black

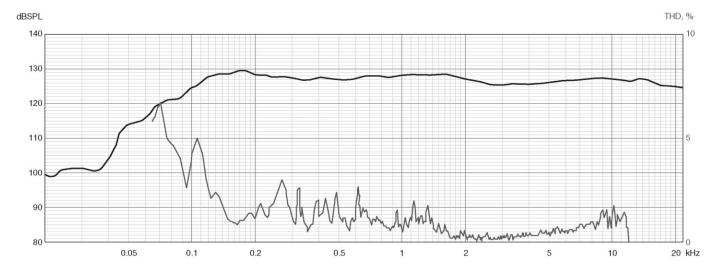











ATEÏS Europe B.V.

Celsiusstraat 1, 2652 XN Lansingerland, Netherlands Phone +31 (0)10 208 86 90, www.ateis-europe.com, info.eu@ateis.global